


FIBER OPTIC ADSS CABLE 200MTS SPAN

Mechanical and Environmental Characteristics

Items	Specifications
Tension in Long term (N)	1000
Tension in Short term (N)	3000
Crush in Long term (N/10cm)	300
Crush in Short term (N/10cm)	1000
Min. Bend Radius Dynamic (mm)	20D
Min. Bend Radius Static (mm)	10D
Installation Temperature (C)	-20 ~ +60
Operating Temperature (C)	-40 ~ +70

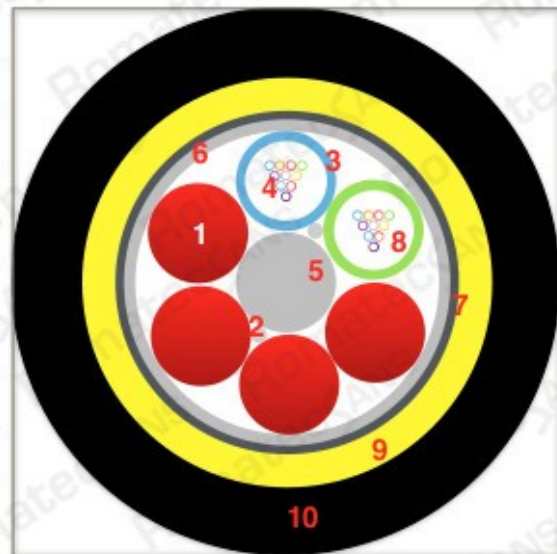

- | | |
|----------------------------|--------------------|
| 1. Filler | 6. Waterproof Tape |
| 2. Water-blocking Yarn | 7. Binding Yarn |
| 3. Loose tube | 8. Filling Gel |
| 4. Colored Coating Fiber | 9. Strength Member |
| 5. Central Strength Member | 10. Outer Jacket |

Items		Specifications
Fibers		6 ~ 48
Colored Coating Fiber	Dimensions	250um ± 15um
	Material	PBT
Loose tube	Dimensions	2.1mm ± 0.05mm
	Material	PBT
Filler	Dimensions	2.1mm ± 0.05mm
	Material	PP
	Color	Red
Central Strength Member	Dimensions	1.5mm
	Material	FRP
Strength Member		Kevlar
Outer Jacket	Dimensions	9.5mm ± 0.3mm
	Material	HDPE
	Color	Black

HONG KONG

Romatecsans International Limited
7/F., Catic Building, No. 44 Tsun Yip
Street, Kowloon, Hong Kong
Tel. +852 8199 9706
asia@romatecsans.com

CHILE

Importadora y Exportadora Romatecsans Ltda.
Carmen Farina 6758, Vitacura,
Santiago, Chile
Tel.: +56 22 9797 922
ventas@romatecsans.com

sales@romatecsans.com
www.romatecsans.com

