


FIBER OPTIC SLIDING PATCH PANEL

The RS1 fiber optic patch panel is designed and manufactured under the telecommunication standards. It is a basic, flexible, light and suitable solution for your installation. Available in 24* FC, SC & ST simplex, 24* FC, LC & SC duplex and 24* LC Quad.

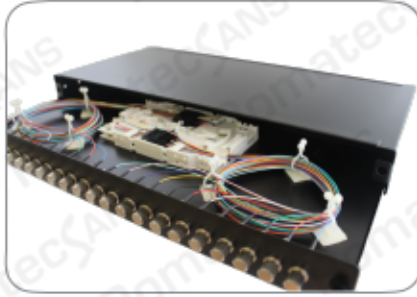

Material	Cold rolled steel 1,2mm thickness
Width (mm)	482
Depth (mm)	205
Capacity	Up to 96 fibers with LC Quad adapters
Weight (kg)	2.65
Operating Temperature (°C)	-40°C ~ +55°C

ORDERING INFORMATION

Model	Adapter	Polishing	Type	Colors	Ports	Fiber	Length (m)
RS1	FC	A APC	D Duplex	1 Aqua	1	OS1 G.652B	1
	E2000	U UPC	Q Quad	2 Blue	2	OS2 G.652D	2
	LC		S Simplex	3 Beige	3	655 G.655	3
	MU			4 Green	657 G.657	
	SC			5 12 colors	7	OM1 62.5/125	
	ST					8 OM2 50/125	
						OM3 50/125	
						OM4 50/125	

ORDERING INFORMATION EXAMPLE

RS1	LC	U	D	5	6	OS2	1
-----	----	---	---	---	---	-----	---

Configuration: Fiber Optic Sliding Patch Panel LC UPC 24 DX 48 Colors OS2 1mts pigtails

HONG KONG

Romatecsans International Limited
7/F., Catic Building, No. 44 Tsun Yip
Street, Kowloon, Hong Kong
Tel. +852 8199 9706
asia@romatecsans.com

CHILE

Importadora y Exportadora Romatecsans Ltda.
Carmen Farina 6758, Vitacura,
Santiago, Chile
Tel.: +56 22 9797 922
ventas@romatecsans.com

sales@romatecsans.com
www.romatecsans.com

