
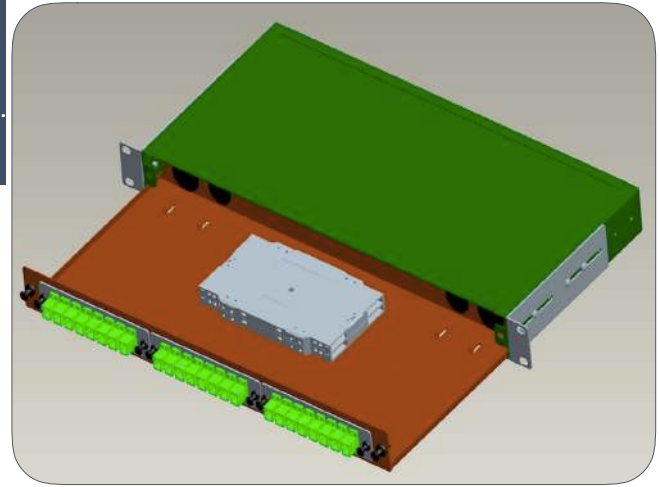


FIBER OPTIC SLIDING RS6 PATCH PANEL

The RS6 fiber optic patch panel is designed in accordance with TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, RoHS, Reach and SvHC. It is a basic, flexible, light and suitable solution for your installation. 3 LGX Modules compatible.

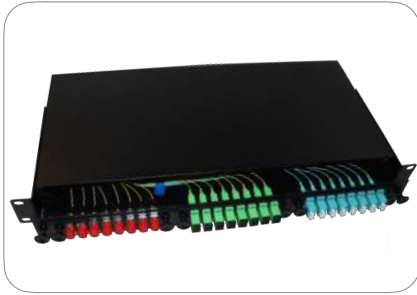

Material	Cold rolled steel 1.2mm thickness
Material Coating	Electrostatic painting
Height (mm)	44.4 (1U)
Width (mm)	483
Depth (mm)	205
IP Rating	IP20
Number of ports	3
Capacity	Up to 72 fibers with LC Quad adapters
Cable entries	2*20mm & 2*25mm
Weight (kg)	2.5
Operating Temperature (°C)	-40°C ~ +55°C

Front Options		
6~8 FC Simplex Adapters 	6~8 LC Duplex Adapters 	6~8 SC Simplex Adapters
6~8 ST Simplex Adapters 	3 LC Quad Adapters 	3 SC Duplex Adapters
6 LC Quad Adapters 	6 SC Duplex Adapters 	8 FC/ST Duplex Adapters