


COPPER RJ45 JACK CAT. 6a UTP

We have a complete structured cabling solution, where our products are manufactured under the UL and ETL standards. We provide to our customers 25 years guarantee on our structured cabling solution.

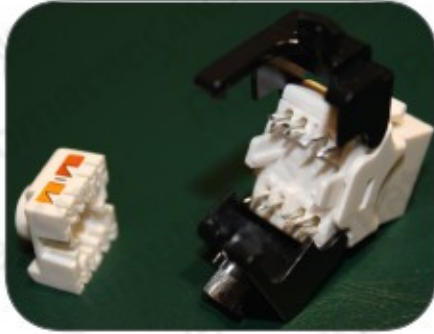

Electrical Specifications

Voltage Rating	DC 1000V
Current Rating	1.5 AMP
Contact Compatibility	22 ~ 26 AWG Solid and 24 AWG Stranded
Insulation Resistance	500 OHMS MIN. @ 500 DC
Dielectric Strength	750 VAC RMS 60Hz, 1 Min.
Storage (°C)	-40 ~ +70
Operation Temperature (°C)	-10 ~ +60
Conformance	TIA/EIA 568B, EIA/TIA568A/B, ISO 11801
Housing Material	PC High Impact UL94V-0
PCB Material	FR -4 T=1.2mm
Contact Material	Phosphor bronze stamp PIN T=0.35mm
IDC Contact Material	Phosphor bronze PIN T=0.5mm (With TIN Plating)
RJ45 Jack Life	< 750 times
IDC Life	< 200 times
Retentiveness of insertion structure	50N 60 ± 5s

HONG KONG

Romatecsans International Limited
7/F., Catic Building, No. 44 Tsun Yip
Street, Kowloon, Hong Kong
Tel. +852 8199 9706
asia@romatecsans.com

CHILE

Importadora y Exportadora Romatecsans Ltda.
Carmen Farina 6758, Vitacura,
Santiago, Chile
Tel.: +56 22 9797 922
ventas@romatecsans.com

sales@romatecsans.com
www.romatecsans.com



ORDERING INFORMATION										
Model	Category	Housing		Color		Punching		Angle		
K	5e	1	FTP	1	Yellow	A	Auto	L	90°	
	6	2	UTP	2	Blue	B	Manual	S	180°	
	6a				3	White				
					4	Metal				
					5	Red				
					6	Green				

ORDERING INFORMATION EXAMPLE					
K	6a	2	3	B	S

Configuration: Copper RJ45 Cat 6a UTP White Manual 180° angle

HONG KONG

Romatecsans International Limited
7/F., Catic Building, No. 44 Tsun Yip
Street, Kowloon, Hong Kong
Tel. +852 8199 9706
asia@romatecsans.com

CHILE

Importadora y Exportadora Romatecsans Ltda.
Carmen Farina 6758, Vitacura,
Santiago, Chile
Tel.: +56 22 9797 922
ventas@romatecsans.com

sales@romatecsans.com
www.romatecsans.com

