


FIBER OPTIC PIGTAIL MM

Our Fiber Optic Pigtailed are manufactured under the telecommunications quality standards. Romatecsans Pigtailed are normally made with Corning Fiber. Telcordia GR-326-CORE, TIA/EIA and IEC standards.

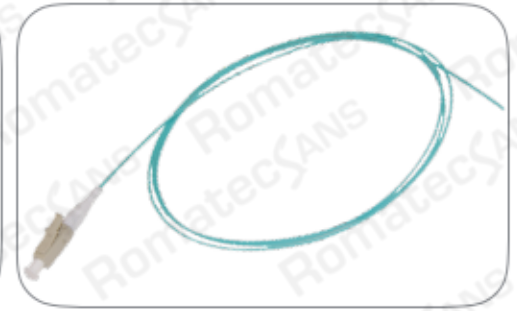

	Multimode (UPC)
Insertion Loss	≤ 0.2dB
Return Loss	≥ 35dB
Durability	≤ 0.1dB typical change (1000 times)
Operating Temperature (°C)	-45 to +85
Repeatability	≤ 0.1dB
Vibration	≤ 0.2dB (550Hz 1.5mm)
Maximum Tensile Load	100N/cm

ORDERING INFORMATION											
Connector	Polishing		Fiber Type		Length (M)	Jacket		Color		Diameter	
FC	A	APC	OM1	62.5/125	1	L	LSZH	A	Aqua	0.2	250um
E2000	U	UPC	OM2	50/125	1.5	P	PVC	O	Orange	0.9	900um
MU			OM3	50/125	2	R	Riser	P	Purple	2	2mm
LC			OM4	50/125	2.5			W	White	3	3mm
LX.5					3			Y	Yellow		
SC								12	12 Colors		
ST											

ORDERING INFORMATION EXAMPLE

ST	U	OM2	3	R	O	2
----	---	-----	---	---	---	---

Configuration: F.O. Pigtail ST/UPC OM2 3mts Riser Orange 2mm

HONG KONG

Romatecsans International Limited
7/F., Catic Building, No. 44 Tsun Yip
Street, Kowloon, Hong Kong
Tel. +852 8199 9706
asia@romatecsans.com

CHILE

Importadora y Exportadora Romatecsans Ltda.
Carmen Farina 6758, Vitacura,
Santiago, Chile
Tel.: +56 22 9797 922
ventas@romatecsans.com

sales@romatecsans.com
www.romatecsans.com

