
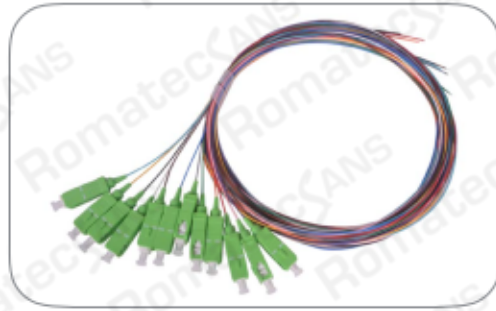


### FIBER OPTIC PIGTAIL SM

Our Fiber Optic Pigtailed are manufactured under the telecommunications quality standards. Romatecsans Pigtailed are normally made with Corning Fiber. Telcordia GR-326-CORE, TIA/EIA and IEC standards.

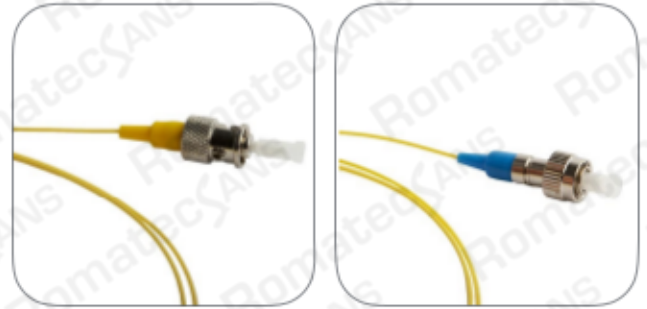

	Singlemode (UPC)	Singlemode (APC)
Insertion Loss	≤ 0.2dB	≤ 0.2dB
Return Loss	≥ 55dB	≥ 65dB
Durability	≤ 0.1dB typical change (1000 times)	
Operating Temperature (°C)	-45 to +85	
Repeatability	≤ 0.1dB	
Vibration	≤ 0.2dB (550Hz 1.5mm)	

#### ORDERING INFORMATION

Connector	Polishing	Fiber Type	Length (M)	Jacket	Color	Diameter
FC	A APC	OS1 G.652B	1	L LSZH	A Aqua	0.2 250um
E2000	U UPC	OS2 G.652D	1.5	P PVC	O Orange	0.9 900um
MU		655 G.655C	2	R Riser	P Purple	2 2mm
LC		7A1 G.657A1	2.5		W White	3 3mm
LX.5		7A2 G.657A2	3		Y Yellow	
SC		7B3 G.657B3			12 12 Colors	
ST						

#### ORDERING INFORMATION EXAMPLE

ST	A	7B3	3	R	Y	2
----	---	-----	---	---	---	---

Configuration: F.O. Pigtail ST/APC G.657B3 3mts Riser Yellow 2mm

#### HONG KONG

Romatecsans International Limited  
7/F., Catic Building, No. 44 Tsun Yip  
Street, Kowloon, Hong Kong  
Tel. +852 8199 9706  
asia@romatecsans.com

#### CHILE

Importadora y Exportadora Romatecsans Ltda.  
Carmen Farina 6758, Vitacura,  
Santiago, Chile  
Tel.: +56 22 9797 922  
ventas@romatecsans.com

sales@romatecsans.com  
www.romatecsans.com

